


User Manual

Assembly guide for Multi-monitors
LA-517-1 series

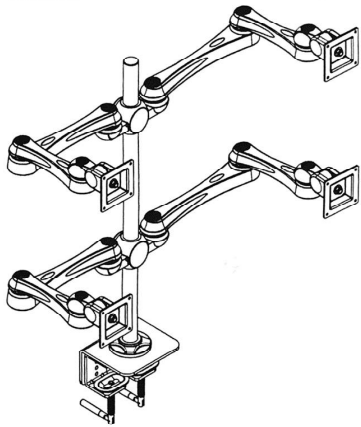

Before assembly, please spend some times to read this manual and follow the procedures step by step assembly guide. Some panels are viewed differently from the detail drawing below. This is for extra clarity. Do not discard any of the packaging until you have checked all the parts and the package of fittings. If you are missing any of the parts, please contact the store from which you purchased your products. The staff will do their best to help you.

Check - list

01					
01		X16	05		X4
02		X32	06		X4
03		X4	07		X2
04		X2			

LA-201A

08		x1	10		X8
09		x1	11		(6mm) X1
			12		X2

LA-501-700

13		(700L*4t)x1	16		X4
14		X1	17		(4mm)X1
15		X1	18		X1
			19		X3

Assembly Guide

02

(1) Place LCD with facing downward on flat surface. Place VESA on the LCD back as figure and level at holes. secure them together with four screws. And then tighten them up with screwdriver(not supplied).

(2) Secure the cranking unit to the bracket with at least fore bolts. The use of bolts and bolts position depends thickness of desk. Fully secure bolts with allen key(6mm) provided.

(3) Fix the clamp on the desk. Use 4mm Allen key to secure the pole & clamp with 4 screws. For desks 15-100 mm thick, over 30 mm is suggested.

Then put the screw plate cover through the pole and check the pin position with the screw together.

(4) Loosen two screws slightly. Put the arm into the pole and adjust it to the suitable position. Tighten it up with 4mm allen Key. Put in the plug.

Assembly Guide

03

(5) Parts a. b offer for cable.

Use cable cover supplied to finish cable management. Secure them together with screws. And then nylon nut is loose, please use the Wrench to tighten the arm.

Wrench x1

cable management arrange cable on pole as required.

Caution:

- There are many small components used in the construction of this unit. These loose items should be kept away from young children while assembling your unit.
- This product is for monitor less than 36 kg (79.2 lbs) .
- Incomplete or inadequate mounting of this unit to the wall may Cause it to fall down, resulting in potentially fatal accidents.
- Please consult authorized service personnel for the installation.